

### 一、HD螺旋锥齿换向传动器产品介绍 HD series spiral bevel gear unit

螺旋锥齿换向传动器和换向减速器，其结构特点如下：

- 箱体形状为正六面体，能适应不同方位的安装。
- 换向器设计使用寿命长，承载能力大，传动平稳，噪音低齿轮线速度可高达40米/秒，传动效率高达94%~98%。
- 弧齿圆锥齿轮采用优质低碳合金结构钢，经渗碳淬火热处理，并经研磨跑合，实现精度较高的硬齿面闭式传动。
- HD系列换向器共有七种规格，选型范围大，输出轴形式多样，可满足多种场合的需要。
- 可实现减速和增速两种传动方式。

spiral bevel gear unit,the following is trait:


- the box is hexahedron,which can fit different direction mounting
- long-lift using and big load,sooth transmission,low noise,transmission efficiency can up to 94%-98%
- spiral bevel gears are made of low carbon alloy steel,through quenching and whetting,come to high precision rigidity tooth transmission
- HD serie have seven specs,big choosing range,mult- output shaft mode which meet various situation
- enhancing and reducing speed

### 二、型号表示法 Mode denotation



#### 联接代号及形式 Connection symbol and form

|  |  |
|--|--|
| HD 输入、输出轴伸式联接<br>HD coupled of input(output)shaft stretch          | HDA 输入轴伸、输出轴装式联接<br>HDA coupled of input shaft stretch and output shaft mounting |
| HDF 带输入法兰、输出轴伸式联接<br>HDF coupled of output shaft with input flange | HDAF 带输入法兰、输出轴装式联接<br>HDAF input flange、 coupled of output shaft mounting        |

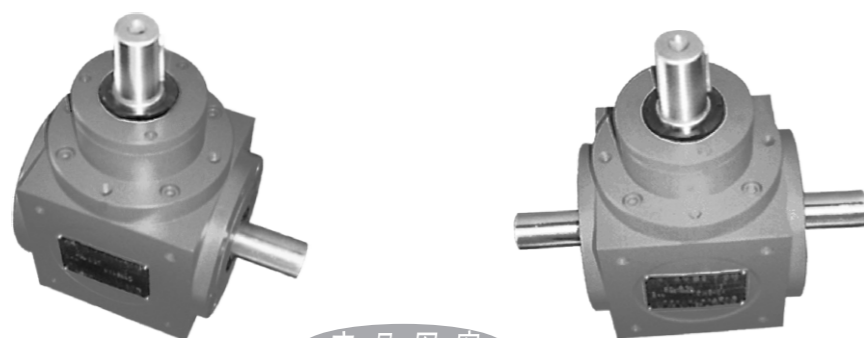

产品图案  
Product chart

### 三、传动比计算 Ratio account

$$\text{传动比 } i = \frac{\text{输入转速 } n_1}{\text{输出转速 } n_2} \quad \text{当 } i \text{ 大于 } 1 \text{ 时为减速, } i \text{ 小于 } 1 \text{ 时为增速}$$

$$\text{Ratio } i = \frac{\text{Input speed } n_1}{\text{Output speed } n_2} \quad \text{When } i > 1 \text{ reducing speed, } i < 1 \text{ adding speed}$$

### 四、型号的选择 Choosing type

- 选型计算公式: (1)  $P_{1N} = P_1 \times f$  (每小时起停次数不大于20次/小时)
- (2)  $P_{1N} = 1.2 \times P_1 \times f$  (每小时起停次数21~60次/小时)
- (3)  $P_{1N} \leq P_N$

选型功率必须小于或等于许用功率

式中:  $P_{1N}$ 为选型功率,  $P_1$ 为实际需要的功率,  $f$ 为使用系数,  $P_N$ 为许用功率。

- Calculation formula: (1)  $P_{1N} = P_1 \times f$  (not higher than 20/hour)  
 (2)  $P_{1N} = 1.2 \times P_1 \times f$  (start 21-60/hour)  
 (3)  $P_{1N} \leq P_N$

select power must be lower or equal to fixed power

note:  $P_{1N}$  is select power  $P_1$  is demand power,  $f$  is service factor,  $P_N$  is fixed power.

#### 2. 使用系数 $f$ Using quotiety $f$

| 原动机<br>Driving machine                                    | 每天工作时间<br>(小时)<br>Working hours/day<br>(hour) | 承载类型 Load type       |                       |                     |
|---|---|----------------------|-----------------------|---------------------|
|   |   | 均匀负载<br>Uniform load | 中等冲击负载<br>Medium load | 重冲击负载<br>Heavy load |
| 电动机<br>汽轮机<br>液压马达<br>motor<br>turbine<br>hydraulic motor | 3   | 0.8                  | 1                     | 1.5                 |
|   | 3~10  | 1                    | 1.25                  | 1.25                |
|   | 10~24   | 1.25                 | 1.5                   | 2                   |
| 内燃机<br>Gas engine   | 3   | 1.25                 | 1.5                   | 2                   |
|   | 3~10  | 1.5                  | 1.75                  | 2.25                |
|   | 10~24   | 1.25                 | 2                     | 2.5                 |

### 五、热功率校核 thermal power

1. 热功率计算:  $P_{GN} = P_G \times f_1 \times f_2$

$P_{GN} > P_1$  (自然冷却)

$P_{GN} < P_1$  (风扇或油冷却)

式中:  $f_1$ 为环境温度系数,  $f_2$ 为连续工作系数,  $P_G$ 为换向器热容量,  $P_1$ 为工作实际需要功率,  $P_{GN}$ 为换向器计算热容量。

thermal power account:  $P_{GN} = P_G \times f_1 \times f_2$

$P_{GN} > P_1$  (nature cooling)

$P_{GN} < P_1$  (fan and oil cooling)

note: surrounding temperature coefficient  $f_1$ , continuous work coefficient  $f_2$ , commutator thermal capacity  $P_G$ ,  $P_1$ : actual need power.  $P_{GN}$ : account thermal capacity of commutator

2. 环境温度系数f1 surrounding temperature coefficient f1

|                         |     |    |      |      |      |
|-------------------------|-----|----|------|------|------|
| 环境温度°C<br>Temperature°C | 10  | 20 | 30   | 40   | 50   |
| 系数f1<br>Coefficient f1  | 1.2 | 1  | 0.87 | 0.75 | 0.64 |

3. 连续工作系数f2 continuous coefficient f2

|                                     |     |     |     |     |     |
|-------------------------------------|-----|-----|-----|-----|-----|
| 每小时工作率%<br>Working efficiency/hour% | 100 | 80  | 60  | 40  | 20  |
| f2                                  | 1   | 1.2 | 1.4 | 1.6 | 1.8 |

六、热容量Pg (自然冷却) thermal capacity PG (nature cooling) KW

| 传动比i<br>ratio i | 箱体型号 Box type |     |    |      |    |    |    |
|-----------------|---------------|-----|----|------|----|----|----|
|                 | 09            | 11  | 14 | 17   | 21 | 24 | 28 |
| 1~5             | 4.5           | 6.5 | 11 | 15.5 | 24 | 31 | 44 |

七、通用技术规范

universal technology norm

1. 键和键槽尺寸符合 GB1095-79、GB1096-79 的规定，键槽宽度公差：轴 N9，轮毂 JS9。

2. 输出输入轴中心孔均带螺孔，规格如下：

|             |      |             |       |
|-------------|------|-------------|-------|
| D = 11~13mm | 螺孔M4 | D > 24~30mm | 螺孔M10 |
| > 13~16mm   | 螺孔M5 | > 30~38mm   | 螺孔M12 |
| > 16~21mm   | 螺孔M6 | > 38~50mm   | 螺孔M16 |
| > 21~24mm   | 螺孔M8 | > 50~85mm   | 螺孔M20 |

3. 在外形安装尺寸图中,输入轴、输出轴,在转速和扭矩允许的情况下,可将输出轴作为输入轴实行增速传动。

1.The size of the key and keyway must be accord with GB1095-79、GB1096-79, the tolerance of the keyway width: shaft N9, wheel JS9.

2.The center of the output and input shaft has screw, the standard as follow:

|             |          |             |           |
|-------------|----------|-------------|-----------|
| D = 11~13mm | screw M4 | D > 24~30mm | screw M10 |
| > 13~16mm   | screw M5 | > 30~38mm   | screw M12 |
| > 16~21mm   | screw M6 | > 38~50mm   | screw M16 |
| > 21~24mm   | screw M8 | > 50~85mm   | screw M20 |

3.In the diagram of the mouting diemissions, the output shaft can be considered as input shaft if the speed and torque allowed.

八、选型举例

Choosing example

例：搅拌器驱动用螺旋锥齿轮换向器

搅拌器实际需要功率P1=28KW；电机功率P2=30KW，电机转速n1=2000r/min  
传动比i=2,换向器装配形式为D，每天工作8小时，每小时连续工作时间为60%，每小时起停6次，环境温度为30C。

选型：搅拌器原动机为电动机，中等冲击负载，每天工作8小时，按使用系

f=1.25

选型功率：PIN=P1Xf=28x1.25=35kw(每小时起停6次)

按许用功率：选箱体型号为21，PN=52.4KW>35kw

热功率校核：箱体21,按热容量表 PG=24KW

按环境温度系数表： f1=0.87

按连续工作系数表： f2=1.4

PGN=24X0.87X1.4=29.2KW>28KW

自然冷却即可

选的型号为：HD21-2D

Example: beater is driven by spiral bevel gear unit

beater actual need powerP1=28KW; moter power P2=30KW, motor speed n1=2000r/min  
ratio i=2, mounting type of commutator D. work 8 hours one day, continuous work  
hours of every hour:60%, start stop 6 times/hour, surrounding temperature:30C.

Choosing type: driving machine of beater is motor, medium load, work 8 hours/day,according  
to using coefficient table:

f=1.25

choosing tpye power: PIN=P1Xf=28x1.25=35kw(start stop 6 times/hour)

according to allowable: choosing box tpye21, PN=52.4KW>35kw

thermal power: box 21,according to thermal capacity form PG=24KW

according to surrounding temperature form: f1=0.87

according to continuous work coefficient form: f2=1.4

PGN=24X0.87X1.4=29.2KW>28KW

nature cooling is ok choosing type : HD21-2D


九、传动比、输入输出转速及许用输入功率 ratio、input(output)speed and allowable input power

| 传动比i | 输入转速n1<br>r/min | 输出转速n2<br>r/min | 箱体型号 Box type                               |      |      |      |      |      |      |
|------|-----------------|-----------------|---|------|------|------|------|------|------|
|      |                 |                 | 09  | 11   | 14   | 17   | 21   | 24   | 28   |
|      |                 |                 | 许用输入功率PN (KW) Allowable input power PN (KW) |      |      |      |      |      |      |
| 1    | 2000            | 2000            | 7.55  | 13.8 | 29.9 | 49.2 | 84   | 111  | 188  |
|      | 1500            | 1500            | 6   | 11   | 23.9 | 39.3 | 67.5 | 90.5 | 156  |
|      | 1000            | 1000            | 4.3   | 7.85 | 17.2 | 28.8 | 50.5 | 68   | 115  |
|      | 750             | 750             | 3.4   | 6.15 | 13.4 | 22.8 | 40.8 | 54.5 | 94.2 |
| 1.5  | 2000            | 1333            | 5.45  | 9.7  | 16.8 | 33.9 | 70   | 92.5 | 124  |
|      | 1500            | 1000            | 4.3   | 7.75 | 13.5 | 27.2 | 56.5 | 75.5 | 103  |
|      | 1000            | 667             | 3.05  | 5.45 | 9.7  | 19.6 | 41.2 | 55.5 | 75.5 |
|      | 750             | 500             | 2.3   | 4.25 | 7.6  | 15.5 | 33   | 44.5 | 60.5 |
| 2    | 2000            | 1000            | 4.2   | 7.95 | 14.1 | 26.2 | 52.4 | 71.5 | 107  |
|      | 1500            | 750             | 3.35  | 6.3  | 11.1 | 20.8 | 43.2 | 58.5 | 88   |
|      | 1000            | 500             | 2.35  | 4.45 | 7.85 | 14.9 | 31.4 | 41.9 | 64.5 |
|      | 750             | 375             | 1.8   | 3.45 | 6.2  | 11.6 | 25.2 | 33.8 | 51   |
| 3    | 2000            | 667             | 2.85  | 5.6  | 10.1 | 18.2 | 34.9 | 52.4 | 73   |
|      | 1500            | 500             | 2.2   | 4.45 | 7.95 | 14.4 | 27.7 | 41.9 | 58.5 |
|      | 1000            | 333             | 1.5   | 3.1  | 5.6  | 10.1 | 20   | 30.2 | 42.4 |
|      | 750             | 250             | 1.2   | 2.4  | 4.4  | 7.8  | 15.7 | 23.6 | 33.5 |
| 4    | 2000            | 500             | 2.15  | 3.75 | 6.8  | 10.5 | 23.3 | 37.7 | 47.6 |
|      | 1500            | 375             | 1.65  | 2.9  | 5.3  | 8.4  | 18.5 | 30.2 | 38.5 |
|      | 1000            | 250             | 1.15  | 2    | 3.75 | 5.9  | 13.4 | 21.7 | 27.5 |
|      | 750             | 188             | 0.87  | 1.55 | 2.95 | 4.55 | 10.4 | 17.1 | 21.7 |
| 5    | 2000            | 400             | 1.4   | 2.95 | 5.05 | 8.05 | 15.9 | 28.9 | 39.4 |
|      | 1500            | 300             | 1.1   | 2.35 | 3.95 | 6.45 | 12.7 | 23.4 | 31.4 |
|      | 1000            | 200             | 0.75  | 1.6  | 2.75 | 4.5  | 9    | 16.4 | 22.4 |
|      | 750             | 150             | 0.58  | 1.25 | 2.1  | 3.45 | 6.95 | 13   | 17.7 |

注：1. 本表的许用功率数值为减速是适用，当要求增速时，许用功率数值应乘传动比。  
2. 输入输出轴超出表中范围时，请与我们联系。

HD09-HD28(i=1~5)输入输出轴伸式联接  
HD外形安装尺寸


HD09-HD28 (i=1~5) coupled of input (output) shaft stretch  
HD outline and mounting dimension

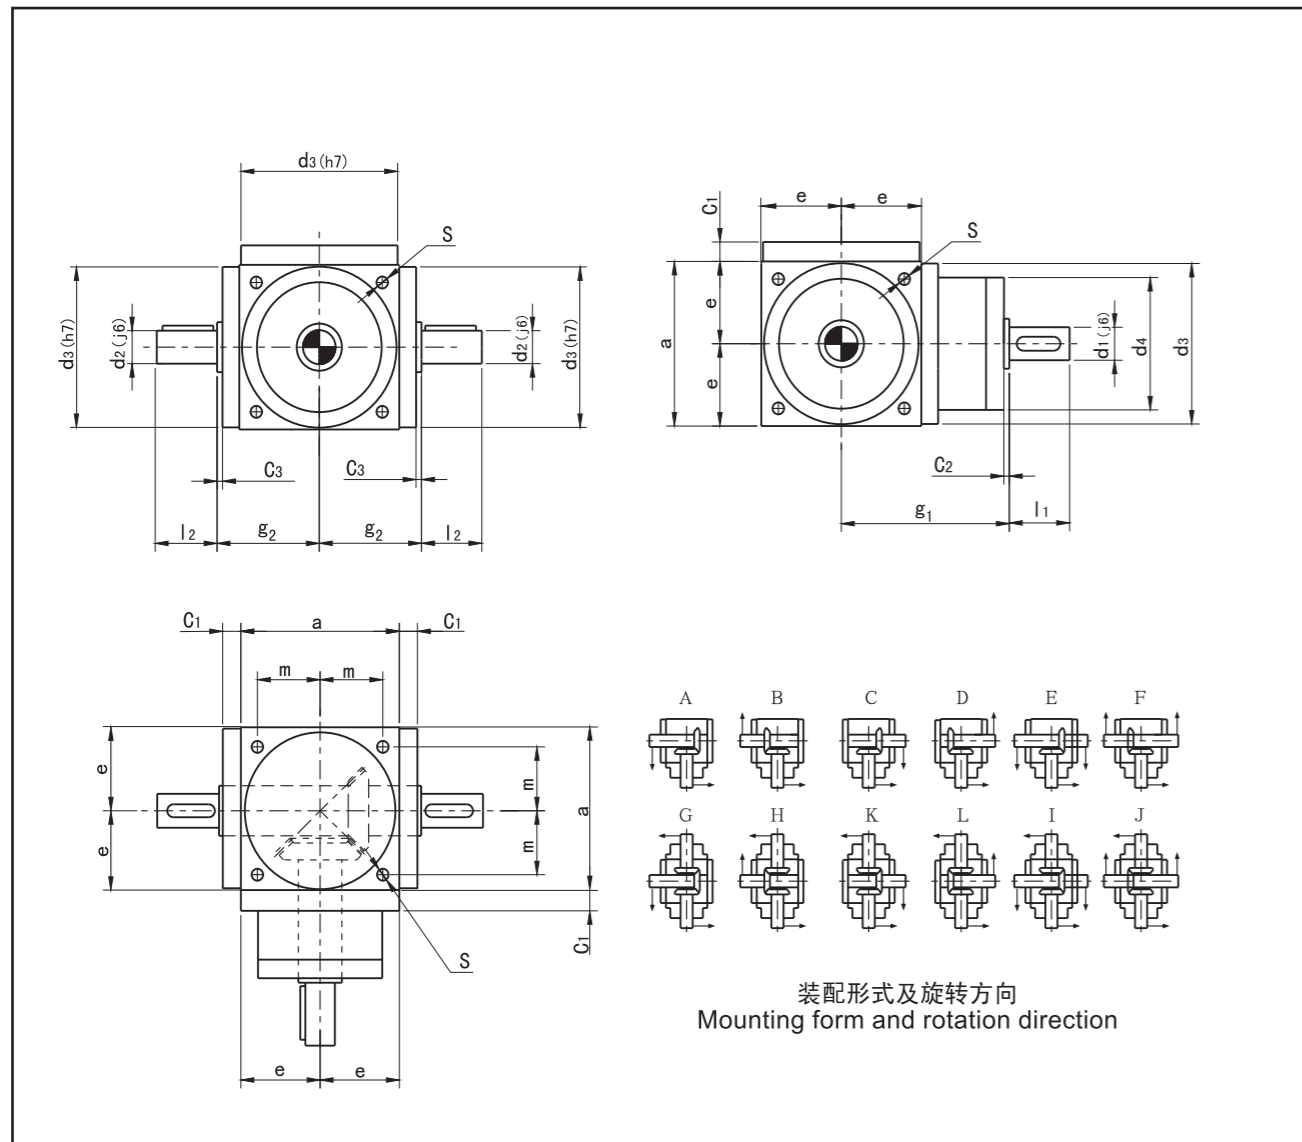

| 型号<br>TYPE | a   | C1 | C2 | C3 | d2 | l2  | d3  | e   | g1  | g2  | m   | S   | i=1~2 |     | i=3 |    | i=4 |    | i=5 |    | 重量<br>Weight | 加油<br>Oil |     |     |
|------------|-----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-------|-----|-----|----|-----|----|-----|----|--------------|-----------|-----|-----|
|            |     |    |    |    |    |     |     |     |     |     |     |     | d1    | l1  | d1  | l1 | d1  | l1 | d1  | l1 |              |           | d4  | d4  |
| 09         | 90  | 12 | 2  | 2  | 18 | 35  | 88  | 45  | 97  | 59  | 36  | M6  | 18    | 35  | 16  | 30 | 11  | 23 | 11  | 23 | 72           | 62        | 6   | 0.2 |
| 11         | 110 | 12 | 2  | 2  | 22 | 40  | 108 | 55  | 112 | 69  | 44  | M8  | 22    | 40  | 20  | 35 | 16  | 30 | 14  | 25 | 81           | 72        | 10  | 0.3 |
| 14         | 140 | 12 | 2  | 2  | 32 | 50  | 135 | 70  | 132 | 84  | 55  | M10 | 32    | 50  | 26  | 45 | 20  | 35 | 16  | 30 | 98           | 81        | 20  | 0.4 |
| 17         | 170 | 15 | 2  | 3  | 40 | 60  | 165 | 85  | 158 | 103 | 67  | M12 | 40    | 60  | 32  | 50 | 26  | 45 | 22  | 40 | 118          | 98        | 32  | 1   |
| 21         | 210 | 18 | 2  | 2  | 45 | 70  | 205 | 105 | 195 | 125 | 85  | M16 | 45    | 70  | 38  | 55 | 32  | 50 | 30  | 50 | 128          | 110       | 60  | 2   |
| 24         | 240 | 18 | 2  | 2  | 55 | 85  | 235 | 120 | 220 | 140 | 95  | M16 | 55    | 85  | 45  | 70 | 38  | 55 | 35  | 55 | 138          | 120       | 75  | 2.5 |
| 28         | 280 | 18 | 2  | 2  | 60 | 110 | 275 | 140 | 255 | 160 | 110 | M16 | 60    | 110 | 50  | 80 | 45  | 70 | 42  | 70 | 150          | 135       | 115 | 3   |

HD09-HD28(i=1:1.5,i=1:2)输入输出轴伸式联接  
HD外形安装尺寸


HD09-HD28 (i=1:1.5,i=1:2) coupled of input (output) shaft stretch  
HD outline and mounting dimension

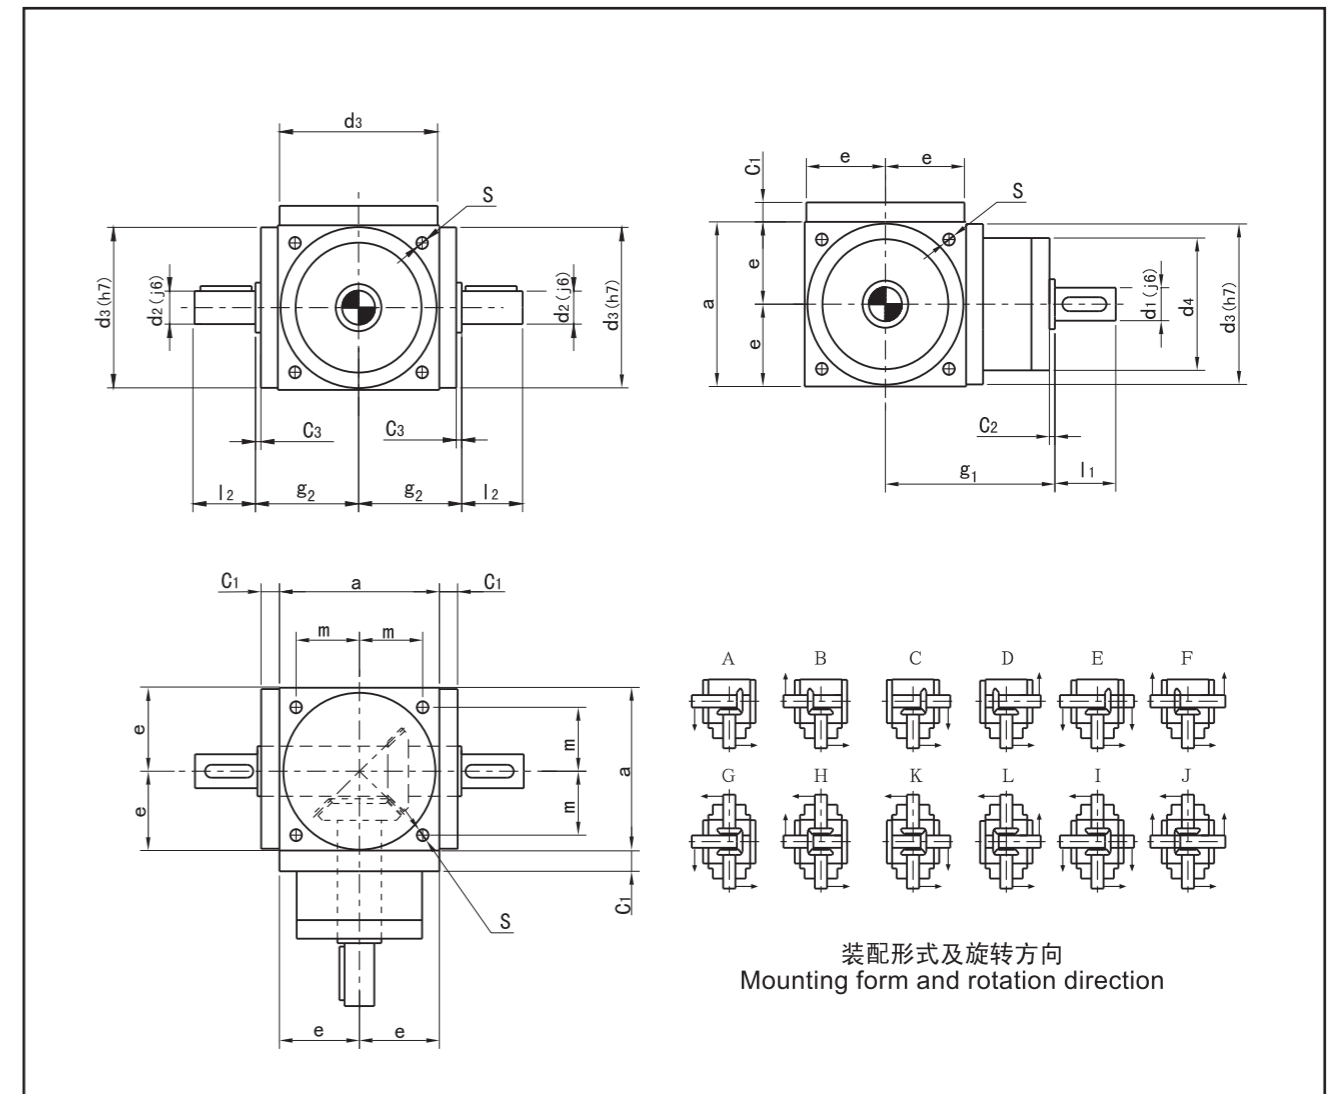

| 型号<br>TYPE | a   | C1 | C2 | C3 | d1 | l1  | d3  | e   | g1  | g2  | m   | S   | d4  | i=1:1.5 |    | i=1:2 |    | 重量<br>Weight | 加油<br>Oil |
|------------|-----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|---------|----|-------|----|--------------|-----------|
|            |     |    |    |    |    |     |     |     |     |     |     |     |     | d2      | l2 | d2    | l2 |              |           |
| 09         | 90  | 12 | 2  | 2  | 18 | 35  | 88  | 45  | 97  | 59  | 36  | M6  | 72  | 11      | 23 | 14    | 25 | 6            | 0.2       |
| 11         | 110 | 12 | 2  | 2  | 22 | 40  | 108 | 55  | 112 | 69  | 44  | M8  | 81  | 14      | 25 | 18    | 35 | 10           | 0.3       |
| 14         | 140 | 12 | 2  | 2  | 32 | 50  | 135 | 70  | 132 | 84  | 55  | M10 | 98  | 16      | 30 | 24    | 40 | 20           | 0.4       |
| 17         | 170 | 15 | 2  | 3  | 40 | 60  | 165 | 85  | 158 | 103 | 67  | M12 | 118 | 22      | 40 | 28    | 45 | 32           | 1         |
| 21         | 210 | 18 | 2  | 2  | 45 | 70  | 205 | 105 | 195 | 125 | 85  | M16 | 128 | 30      | 50 | 38    | 55 | 60           | 2         |
| 24         | 240 | 18 | 2  | 2  | 55 | 85  | 235 | 120 | 220 | 140 | 95  | M16 | 138 | 35      | 55 | 45    | 70 | 75           | 2.5       |
| 28         | 280 | 18 | 2  | 2  | 60 | 110 | 275 | 140 | 255 | 160 | 110 | M16 | 150 | 42      | 70 | 50    | 80 | 115          | 3         |

HDA09-HDA28输入轴伸, 输出轴装式联接  
HDA外形安装尺寸

HDA09-HDA28 coupled of input shaft stretch and output shaft mounting  
HDAoutline and mounting dimension

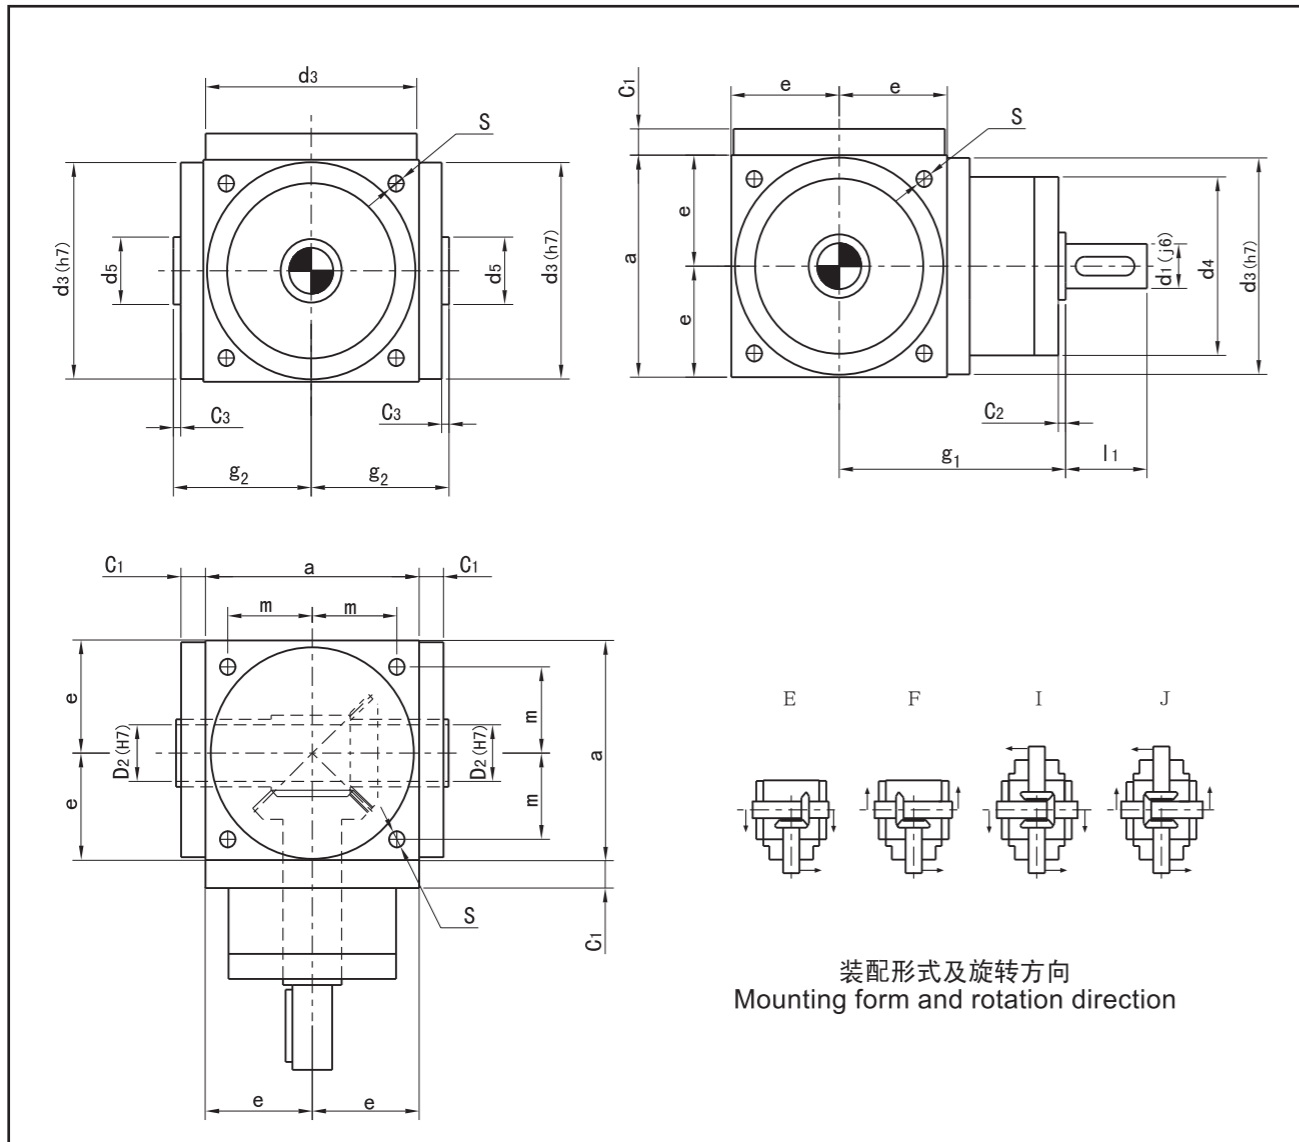


装配形式及旋转方向  
Mounting form and rotation direction

| 型号<br>TYPE | a   | C1 | C2 | C3 | D2 | d5 | d3  | e   | g1  | g2  | m   | S   | i=1~2 |     | i=3 |    | i=4 |    | i=5 |    | i=1~3 |     | i=4~5 |     | 重量<br>Weight<br>Kg | 加油<br>Oil<br>L |
|------------|-----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-------|-----|-----|----|-----|----|-----|----|-------|-----|-------|-----|--------------------|----------------|
|            |     |    |    |    |    |    |     |     |     |     |     |     | d1    | l1  | d1  | l1 | d1  | l1 | d1  | l1 | d4    | d4  | Kg    | L   |                    |                |
| 09         | 90  | 12 | 2  | 2  | 16 | 25 | 88  | 45  | 97  | 59  | 36  | M6  | 18    | 35  | 16  | 30 | 11  | 23 | 11  | 23 | 72    | 62  | 6     | 0.2 |                    |                |
| 11         | 110 | 12 | 2  | 2  | 22 | 35 | 108 | 55  | 112 | 69  | 44  | M8  | 22    | 40  | 20  | 35 | 16  | 30 | 14  | 25 | 81    | 72  | 10    | 0.3 |                    |                |
| 14         | 140 | 12 | 2  | 2  | 28 | 45 | 135 | 70  | 132 | 84  | 55  | M10 | 32    | 50  | 26  | 45 | 20  | 35 | 16  | 30 | 98    | 81  | 20    | 0.4 |                    |                |
| 17         | 170 | 15 | 2  | 3  | 38 | 55 | 165 | 85  | 158 | 103 | 67  | M12 | 40    | 60  | 32  | 50 | 26  | 45 | 22  | 40 | 118   | 98  | 32    | 1   |                    |                |
| 21         | 210 | 18 | 2  | 2  | 45 | 65 | 205 | 105 | 195 | 125 | 85  | M16 | 45    | 70  | 38  | 55 | 32  | 50 | 30  | 50 | 128   | 110 | 60    | 2   |                    |                |
| 24         | 240 | 18 | 2  | 2  | 55 | 75 | 235 | 120 | 220 | 140 | 95  | M16 | 55    | 85  | 45  | 70 | 38  | 55 | 35  | 55 | 138   | 120 | 75    | 2.5 |                    |                |
| 28         | 280 | 18 | 2  | 2  | 60 | 85 | 275 | 140 | 255 | 160 | 110 | M16 | 60    | 110 | 50  | 80 | 45  | 70 | 42  | 70 | 150   | 135 | 115   | 3   |                    |                |

HDF09-HDF28带输入法兰, 输出轴伸式联接  
HDF外形安装尺寸

HDF09-HDF28 coupled of output shaft with input flange  
HDFoutline and mounting dimension

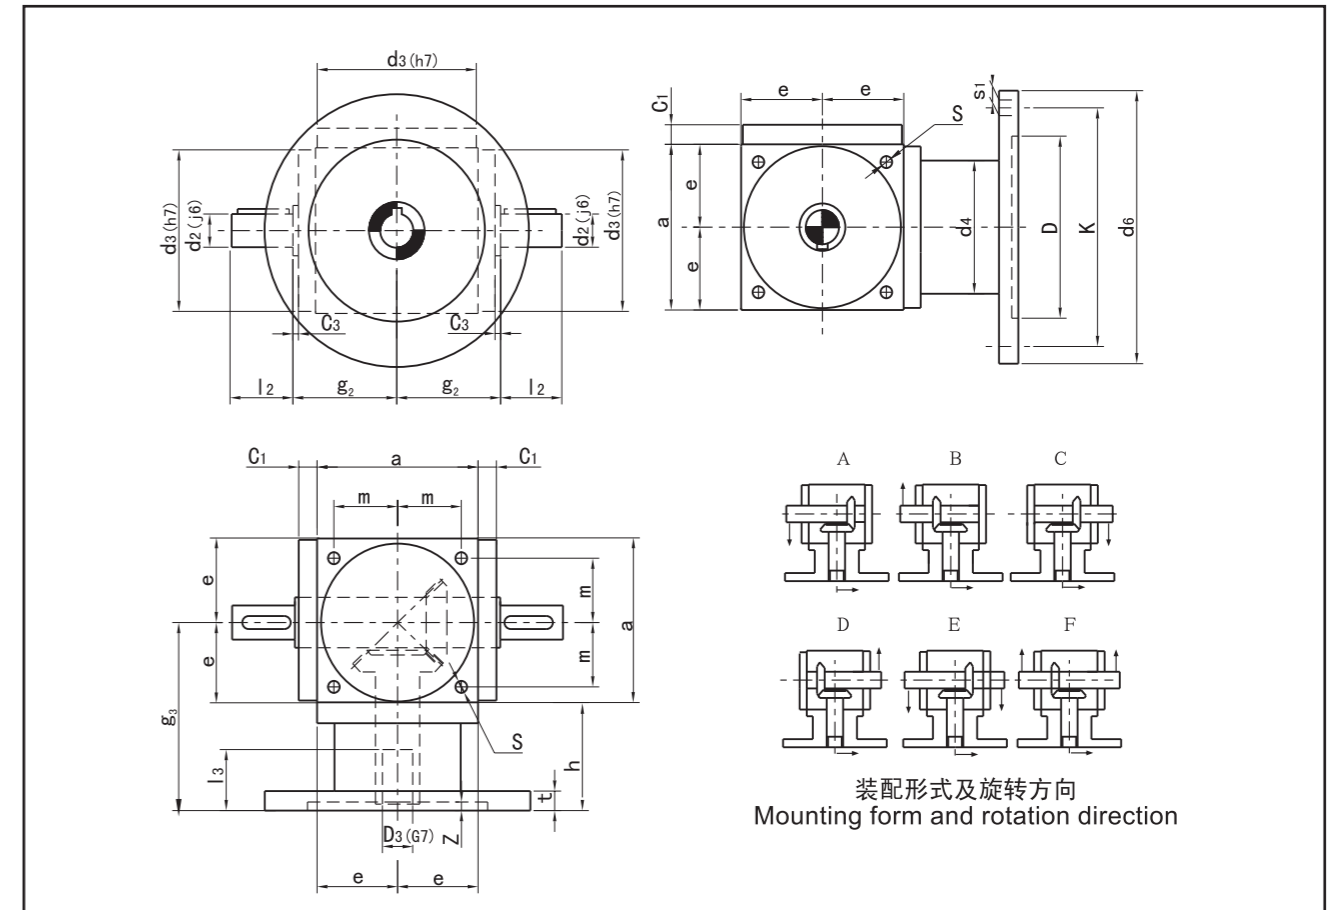

装配形式及旋转方向  
Mounting form and rotation direction


| 型号<br>TYPE | a   | C1 | C3 | d3  | d4  | d2 | l2  | i=1~2  |        |        |        | i=3~5  |        |        |       |
|------------|-----|----|----|-----|-----|----|-----|--------|--------|--------|--------|--------|--------|--------|-------|
|            |     |    |    |     |     |    |     | D3Xl3  |        |        |        | D3Xl3  |        |        |       |
| 09         | 90  | 12 | 2  | 88  | 86  | 18 | 35  | 19X43  | 14X33  | 11X26  | 9X23   | 19X43  | 14X33  | 11X26  | 9X23  |
| 11         | 110 | 12 | 2  | 108 | 82  | 22 | 40  | 24X53  | 19X43  | 14X33  | 11X26  | 24X53  | 19X43  | 14X33  | 11X26 |
| 14         | 140 | 12 | 2  | 135 | 104 | 32 | 50  | 38X83  | 28X63  | 24X53  | 19X43  | 28X63  | 24X53  | 19X43  | 14X43 |
| 17         | 170 | 15 | 3  | 165 | 128 | 40 | 60  | 42X115 | 38X83  | 28X63  | 24X53  | 38X83  | 28X63  | 24X53  | 19X43 |
| 21         | 210 | 18 | 2  | 205 | 160 | 45 | 70  | 48X115 | 42X115 | 38X83  | 28X63  | 42X115 | 38X83  | 28X63  | 24X53 |
| 24         | 240 | 18 | 2  | 235 | 170 | 55 | 85  | 55X115 | 48X115 | 42X115 | 38X83  | 48X115 | 42X115 | 38X83  | 28X63 |
| 28         | 280 | 18 | 2  | 275 | 190 | 60 | 110 | 60X145 | 55X115 | 48X115 | 42X115 | 55X115 | 48X115 | 42X115 | 38X83 |

| 型号<br>TYPE | e   | g2  | g3  | h   | m   | S   | i=1~2 |     |     |     | i=3~5 |     |     |     |
|------------|-----|-----|-----|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|
|            |     |     |     |     |     |     | d6    |     |     |     |       |     |     |     |
| 09         | 45  | 59  | 110 | 65  | 36  | M6  | 200   | 160 | 140 | 120 | 200   | 160 | 140 | 120 |
| 11         | 55  | 69  | 130 | 75  | 44  | M8  | 200   | 160 | 140 | 120 | 200   | 160 | 140 | 120 |
| 14         | 70  | 84  | 170 | 100 | 55  | M10 | 300   | 250 | 200 | 160 | 300   | 250 | 200 | 160 |
| 17         | 85  | 103 | 215 | 130 | 67  | M12 | 350   | 300 | 250 | 200 | 350   | 300 | 250 | 200 |
| 21         | 105 | 125 | 245 | 140 | 85  | M16 | 350   | 300 | 250 | —   | 350   | 300 | 250 | 200 |
| 24         | 120 | 140 | 265 | 145 | 95  | M16 | 400   | 350 | 300 | 250 | 400   | 350 | 300 | 250 |
| 28         | 140 | 160 | 315 | 175 | 110 | M16 | 450   | 400 | 350 | 300 | 400   | 350 | 300 | —   |

| d6  | D   | K   | s1    | t  | Z   |
|-----|-----|-----|-------|----|-----|
| 120 | 80  | 100 | 4XM6  | 11 | 3.5 |
| 140 | 95  | 115 | 4XM8  | 11 | 3.5 |
| 160 | 110 | 130 | 4XM8  | 11 | 4   |
| 200 | 130 | 165 | 4XM10 | 14 | 4   |
| 250 | 180 | 215 | 4XM12 | 16 | 4.5 |
| 300 | 230 | 265 | 4XM12 | 16 | 4.5 |
| 350 | 250 | 300 | 4XM16 | 20 | 6   |
| 400 | 300 | 350 | 4XM16 | 20 | 6   |
| 450 | 350 | 400 | 4XM16 | 25 | 6   |

HDAF09-HDAF28带输入法兰, 输出轴装式联接  
HDAF外形安装尺寸

HDAF09-HDAF28 coupled of output shaft with input flange  
HDAF outline and mounting dimension

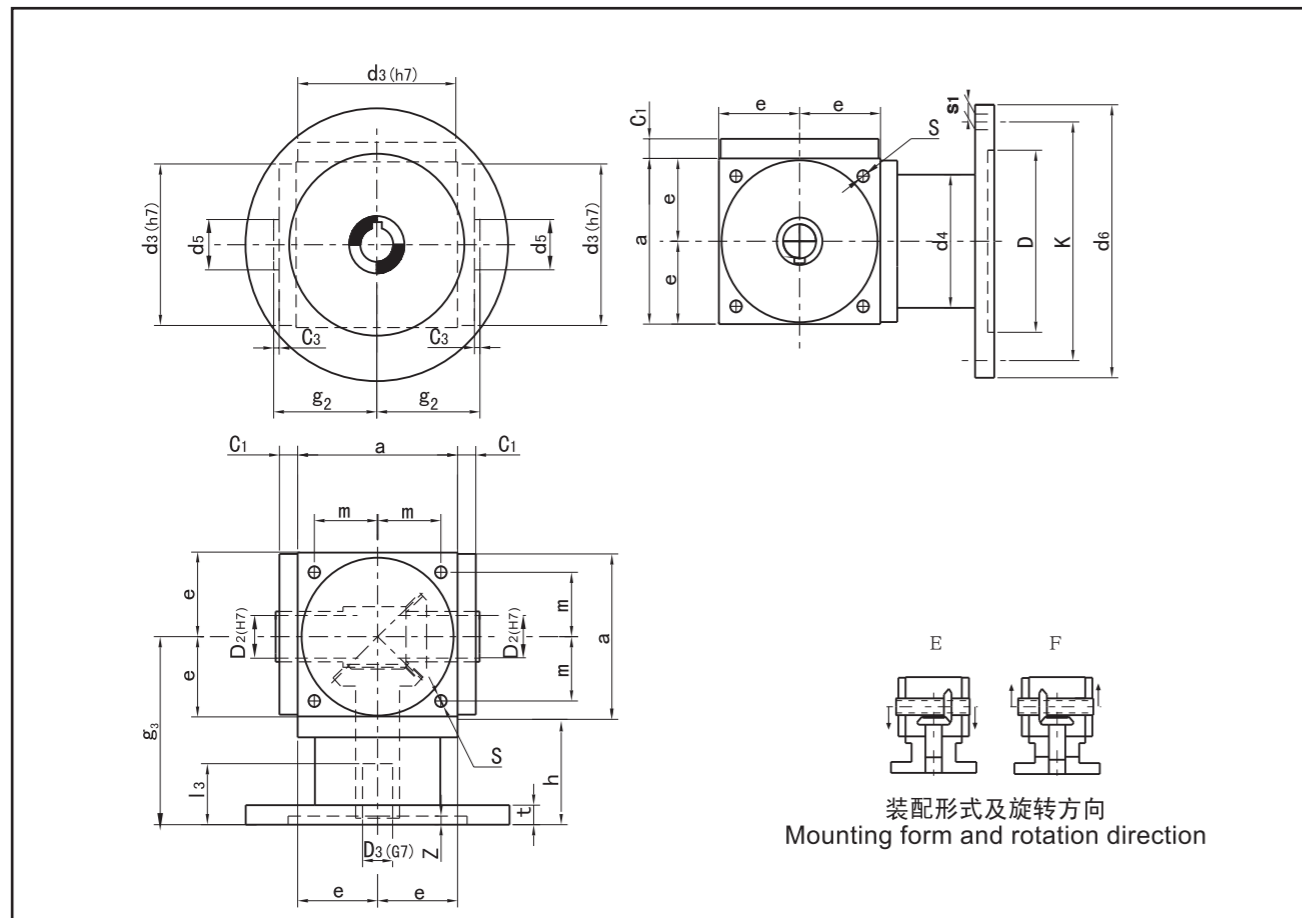


| 型号<br>TYPE | a   | C1 | C3 | d3  | d4  | D2 | d5 | i=1~2  |        |        |        | i=3~5  |        |        |       |
|------------|-----|----|----|-----|-----|----|----|--------|--------|--------|--------|--------|--------|--------|-------|
|            |     |    |    |     |     |    |    | D3X13  |        |        |        |        |        |        |       |
| 09         | 90  | 12 | 2  | 88  | 86  | 16 | 25 | 19X43  | 14X33  | 11X26  | 9X23   | 19X43  | 14X33  | 11X26  | 9X23  |
| 11         | 110 | 12 | 2  | 108 | 82  | 22 | 35 | 24X53  | 19X43  | 14X33  | 11X26  | 24X53  | 19X43  | 14X33  | 11X26 |
| 14         | 140 | 12 | 2  | 135 | 104 | 28 | 45 | 38X83  | 28X63  | 24X53  | 19X43  | 28X63  | 24X53  | 19X43  | 14X33 |
| 17         | 170 | 15 | 3  | 165 | 128 | 38 | 55 | 42X115 | 38X83  | 28X63  | 24X53  | 38X83  | 28X63  | 24X53  | 19X43 |
| 21         | 210 | 18 | 2  | 205 | 160 | 45 | 65 | 48X115 | 42X115 | 38X83  | 28X63  | 42X115 | 38X83  | 28X63  | 24X53 |
| 24         | 240 | 18 | 2  | 235 | 170 | 55 | 75 | 55X115 | 48X115 | 42X115 | 38X83  | 48X115 | 42X115 | 38X83  | 28X63 |
| 28         | 280 | 18 | 2  | 275 | 190 | 60 | 85 | 60X145 | 55X115 | 48X115 | 42X115 | 55X115 | 48X115 | 42X115 | 38X83 |

| 型号<br>TYPE | e   | g2  | g3  | h   | m   | S   | i=1~2 |     |     |     | i=3~5 |     |     |     |
|------------|-----|-----|-----|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|
|            |     |     |     |     |     |     | d6    |     |     |     |       |     |     |     |
| 09         | 45  | 59  | 110 | 65  | 36  | M6  | 200   | 160 | 140 | 120 | 200   | 160 | 140 | 120 |
| 11         | 55  | 69  | 130 | 75  | 44  | M8  | 200   | 160 | 140 | 120 | 200   | 160 | 140 | 120 |
| 14         | 70  | 84  | 170 | 100 | 55  | M10 | 300   | 250 | 200 | 160 | 300   | 250 | 200 | 160 |
| 17         | 85  | 103 | 215 | 130 | 67  | M12 | 350   | 300 | 250 | 200 | 350   | 300 | 250 | 200 |
| 21         | 105 | 125 | 245 | 140 | 85  | M16 | 350   | 300 | 250 | —   | 350   | 300 | 250 | 200 |
| 24         | 120 | 140 | 265 | 145 | 95  | M16 | 400   | 350 | 300 | 250 | 400   | 350 | 300 | 250 |
| 28         | 140 | 160 | 315 | 175 | 110 | M16 | 450   | 400 | 350 | 300 | 400   | 350 | 300 |     |

| d6  | D   | K   | s1    | t  | Z   |
|-----|-----|-----|-------|----|-----|
| 120 | 80  | 100 | 4XM6  | 11 | 3.5 |
| 140 | 95  | 115 | 4XM8  | 11 | 3.5 |
| 160 | 110 | 130 | 4XM8  | 11 | 4   |
| 200 | 130 | 165 | 4XM10 | 14 | 4   |
| 250 | 180 | 215 | 4XM12 | 16 | 4.5 |
| 300 | 230 | 265 | 4XM12 | 16 | 4.5 |
| 350 | 250 | 300 | 4XM16 | 20 | 6   |
| 400 | 300 | 350 | 4XM16 | 20 | 6   |
| 450 | 350 | 400 | 4XM16 | 25 | 6   |

Y系列三相异步电动机安装及外形图  
Motor outline and mounting dimension

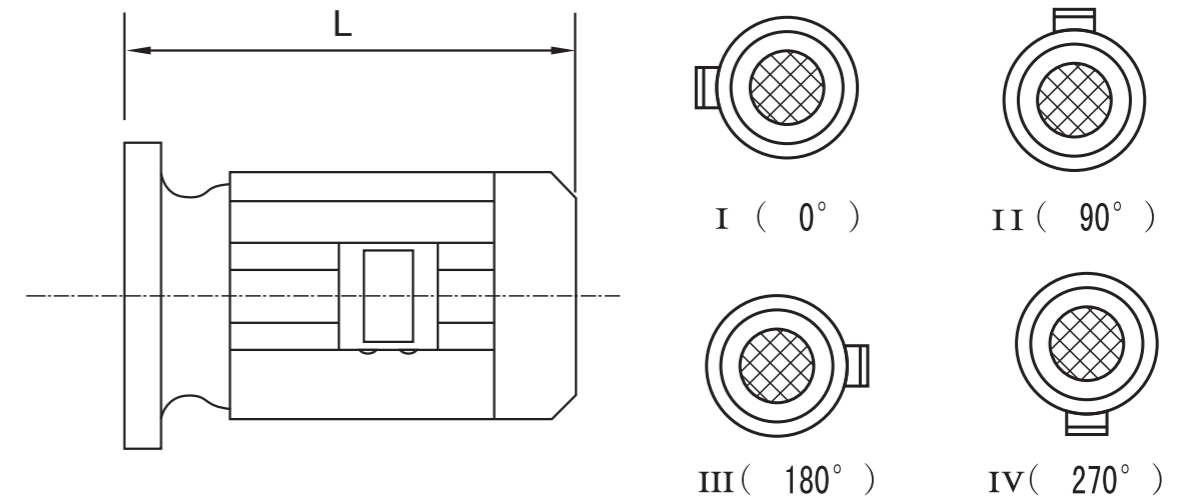

接线盒方向  
Block terminal direction

| 电机机座号 Motor type                  | 71  | 80  | 90S | 90L | 100L | 112M | 132S | 132M | 160M |
|-----------------------------------|-----|-----|-----|-----|------|------|------|------|------|
| 安装尺寸(L) Mounting dimension        | 230 | 260 | 275 | 300 | 330  | 350  | 365  | 445  | 505  |
| 接线盒方向<br>Block terminal direction | I   | I   | I   | I   | I    | I    | I    | I    | I    |
|                                   | II  | II  | II  | II  | II   | II   | II   | II   | II   |
|                                   | III | III | III | III | III  | III  | III  | III  | III  |
|                                   | IV  | IV  | IV  | IV  | IV   | IV   | IV   | IV   | IV   |

| 电机机座号 Motor type                  | 160L | 180M | 180L | 200L | 225S | 225M | 250M | 280S | 280M |
|-----------------------------------|------|------|------|------|------|------|------|------|------|
| 安装尺寸(L) Mounting dimension        | 550  | 570  | 610  | 675  | 690  | 715  | 800  | 870  | 920  |
| 接线盒方向<br>Block terminal direction | I    | I    | I    | I    | I    | I    | I    | I    | I    |
|                                   | II   | II   | II   | II   | II   | II   | II   | II   | II   |
|                                   | III  | III  | III  | III  | III  | III  | III  | III  | III  |
|                                   | IV   | IV   | IV   | IV   | IV   | IV   | IV   | IV   | IV   |